

Ultrasonic flowmeter for water

Portable, very robust and easy-to-use ultrasonic flowmeter for the water and wastewater industry

Features

- Several months of battery operation possible
- Very high bi-directional measuring accuracy and highly dynamic flow measurement
- IP68 transducers, reinforced transducer cables and very robust housing
- Easy and intuitive use
- Very fast and easy installation
- Permanent coupling foil
- High measuring accuracy, even at low flow velocities
- Suitable for highly diverse nominal pipe sizes and pipe materials
- Minimum nightflow mode

Applications

- Temporary measurements in the water and wastewater industry
- Leakage detection
- Water loss balancing
- Accuracy verification of permanently installed flowmeters
- Monitoring of pumping tests



FLUXUS F401

Transmitter

Technical data

		FLUXUS F401
measurement		
measurement principle		transit time difference correlation principle
flow velocity	m/s	0.01...25
repeatability		0.25 % of reading ± 0.01 m/s
fluid		water
accuracy ¹		
• volumetric flow rate		± 2 % of reading ± 0.01 m/s
transmitter		
power supply		<ul style="list-style-type: none"> • 100...230 V/50...60 Hz (power supply unit) • 12 V DC (socket at transmitter) • integrated battery
integrated battery		Li-Ion
• operating time	h	without outputs and backlight, inner pipe diameter max. 1 400 mm: ² <ul style="list-style-type: none"> • continuous measurement: > 48 h • low power mode: <ul style="list-style-type: none"> – > 7 d (measuring interval: 1 min) – > 30 d (measuring interval: 10 min) – > 180 d (measuring interval: 30 min) – > 270 d (measuring interval: 60 min) • minimum nightflow mode: <ul style="list-style-type: none"> – > 14 d (4 h continuous measurement per 24 h) – > 30 d (2 h continuous measurement per 24 h) – > 60 d (1 h continuous measurement per 24 h)
power consumption	W	< 3, charging: 18
number of measuring channels		1
damping	s	0...100 (adjustable, continuous measurement)
measuring cycle	Hz	10
measuring interval		<ul style="list-style-type: none"> • 1 s (continuous measurement) • 1, 5, 10, 15, 30, 60 min (low power mode) • max. 12 h continuous measurement per 24 h (minimum nightflow mode)
housing material		PP
degree of protection		IP67 (housing cover closed) IP65 (housing cover open)
dimensions	mm	273 x 247 x 127
weight	kg	3.1
ambient temperature	°C	-10...+50
display		2 x 16 characters, dot matrix, backlight
menu language		English, German, French, Dutch, Spanish
measuring functions		
physical quantities		volumetric flow rate, mass flow rate, flow velocity
totalizer		volume, mass
communication interfaces		
service interfaces		<ul style="list-style-type: none"> • RS232 • USB (with adapter)
accessories		
serial data kit		optional
• cable		RS232
• adapter		RS232 - USB
software		<ul style="list-style-type: none"> • FluxDiagReader: download of measured values and parameters, graphical presentation • FluxDiag (optional): download of measurement data, graphical presentation, report generation
adapter		• output adapter (optional)
data logger		
loggable values		all physical quantities and totalized values
capacity		> 100 000 measured values

¹ for reference conditions and $v > 0.25$ m/s


² operating time extension using the power pack PP0026NN (optional)

FLUXUS F401	
outputs	
The outputs are galvanically isolated from the transmitter.	
• current output	
number	1 (continuous measurement)
range	mA 4...20 (0...22)
accuracy	0.1 % of reading ±15 µA
passive output	$U_{ext} = 4...24$ V, depending on R_{ext} ($R_{ext} < 1$ kΩ at 24 V)
• binary output	
number	1 (continuous measurement)
optorelay	32 V/200 mA
binary output as alarm output	
• functions	limit or error
binary output as pulse output	
• functions	mainly for totalizing
• pulse value	units 0.01...1000
• pulse width	ms 80...1000

¹ for reference conditions and $v > 0.25$ m/s

² operating time extension using the power pack PP0026NN (optional)

Connection

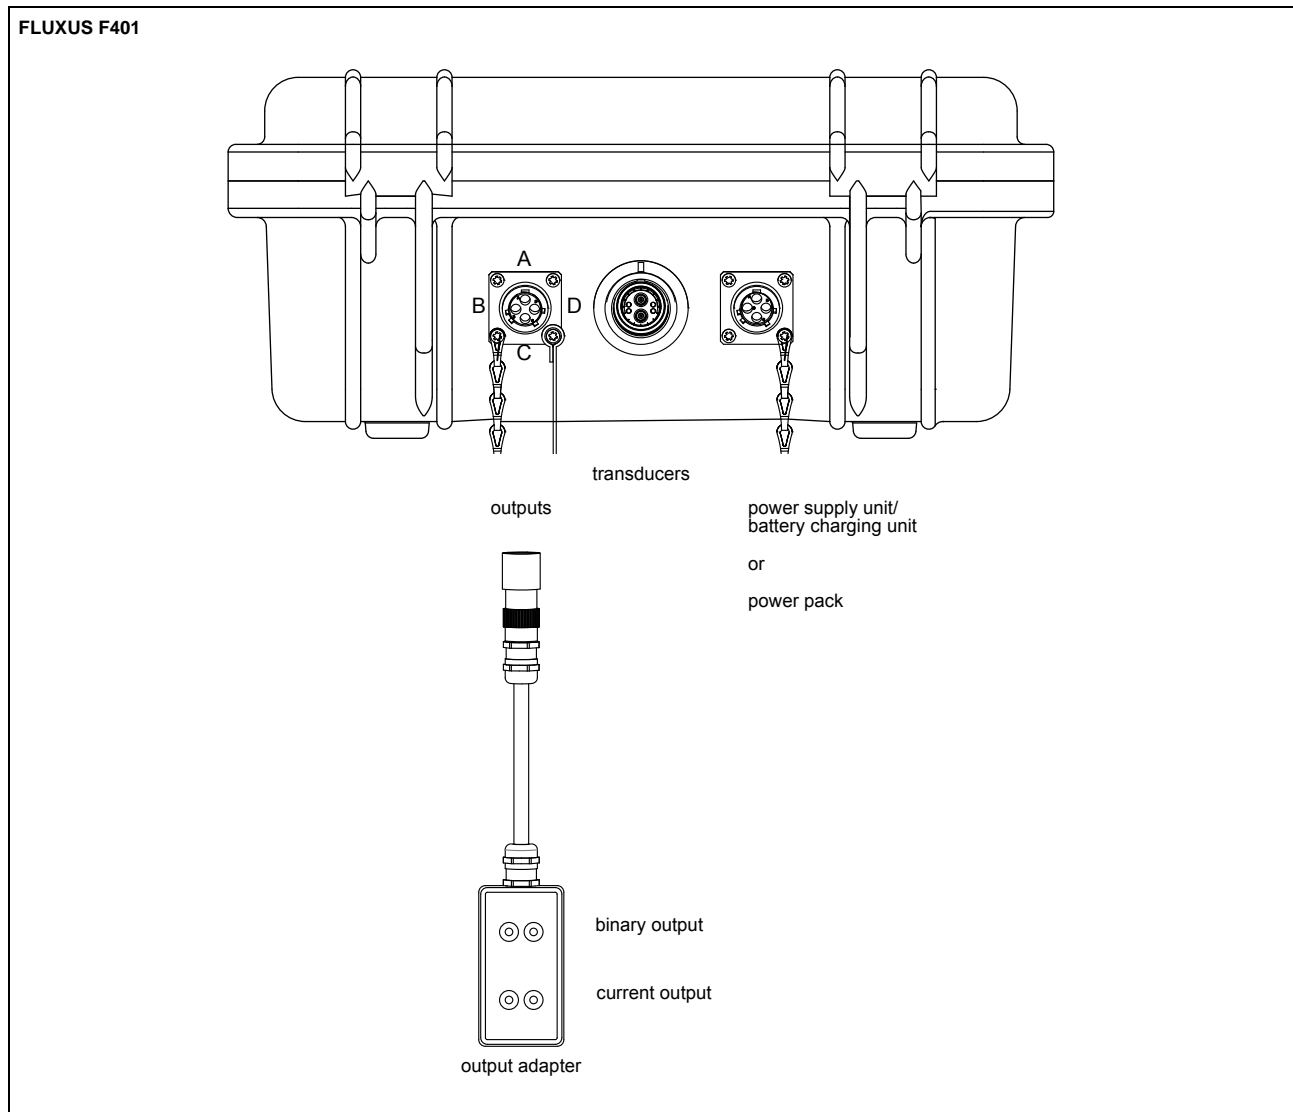


Output adapter

pin	connection
A	binary output (+)
B	binary output (-)
C	current output (+)
D	current output (-)


Transducers

Transducer recommendation for typical water pipe materials

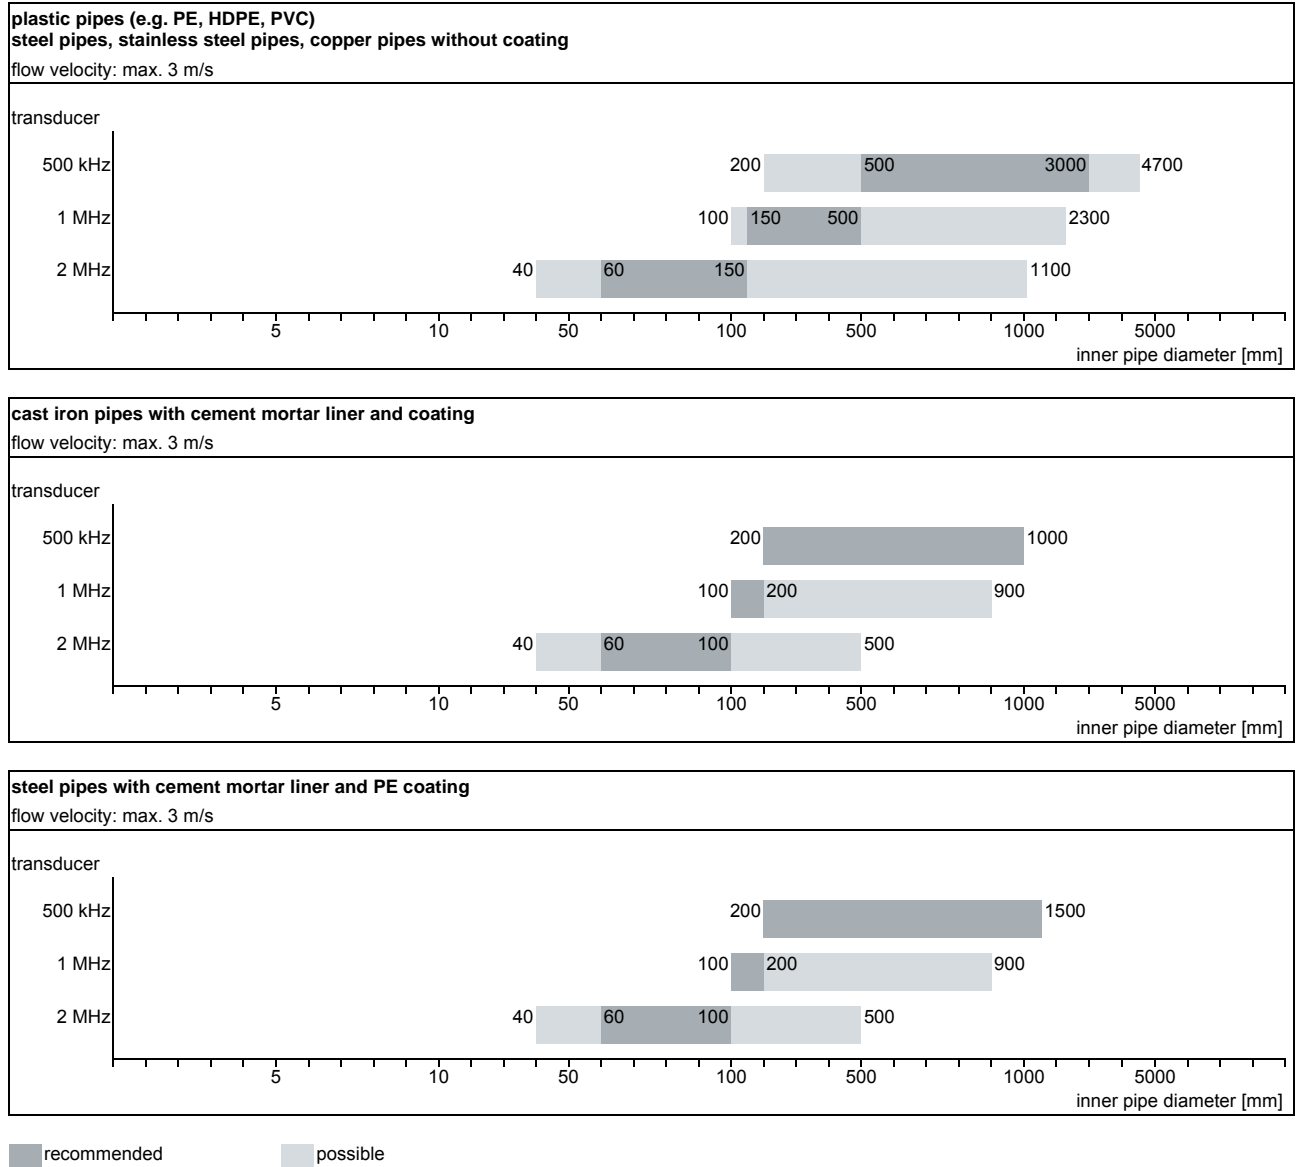



For other pipe materials and higher flow velocities please contact FLEXIM.

Technical data

technical type		500 kHz	1 MHz	2 MHz
transducer frequency MHz		0.5	1	2
inner pipe diameter		see transducer recommendation		
pipe wall thickness				
min.	mm	5	2.5	1.2
material				
housing		PEEK with stainless steel cap 316Ti (1.4571)		
contact surface		PEEK		
degree of protection		IP68 ¹		
transducer cable				
type		7819		
length	m	6		
dimensions				
length l	mm	130	72	
width b	mm	54	32	
height h	mm	83.5	46	
dimensional drawing				
weight (without cable)	kg	0.43	0.085	
ambient temperature				
min.	°C	-40		
max.	°C	+100		

¹ test conditions: 3 months/2 bar (20 m)/20 °C


Transducer mounting fixture
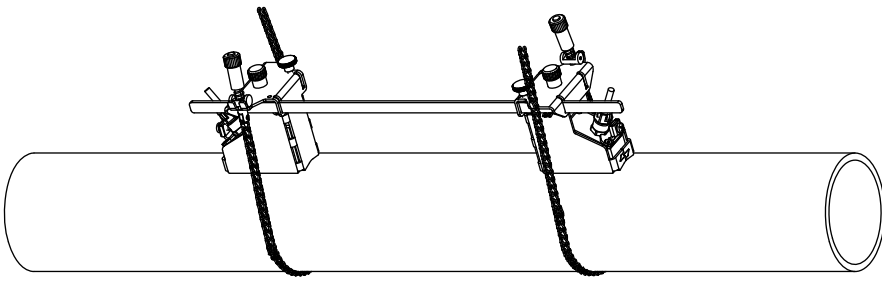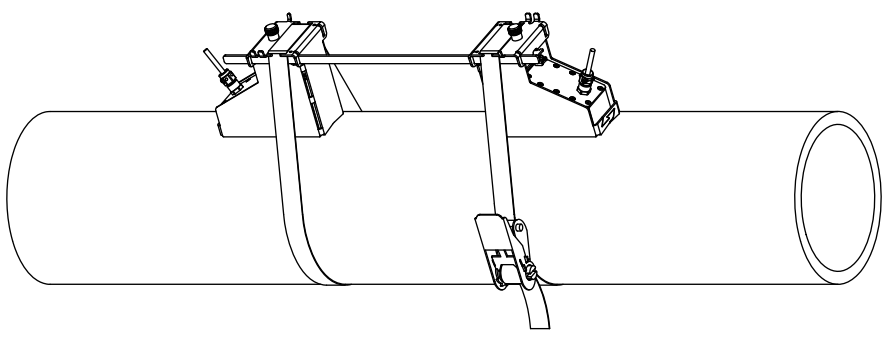
<p>chains and transducer shoes</p> 	<p>material: stainless steel 316Ti (1.4571), 316L (1.4404), 304 (1.4301) chain length: 1/2 m</p>
<p>tension belts TB</p> 	<p>transducer frequency: K material: stainless steel 316Ti (1.4571), 316L (1.4404), steel, powder coated and textile tension belt length: 5/7 m ambient temperature: max. 60 °C outer pipe diameter: max. 1500/2100 mm</p>

Coupling materials for transducers

type	ambient temperature °C	material
coupling foil type VT	-10...+200	fluoroelastomer

Connection systems

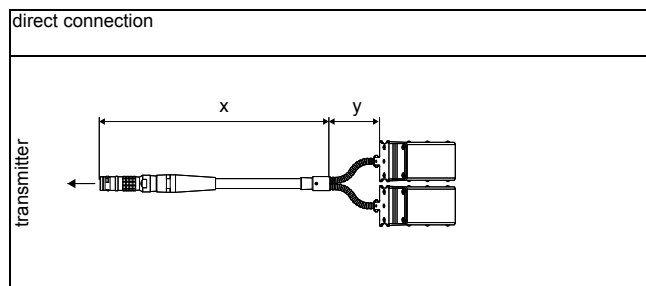

Cable

transducer cable	
type	7819
ambient temperature °C	-40...+100
cable jacket	
material	PUR
outer diameter	mm 5.2 ±0.2
thickness	mm 0.9
colour	grey
shield	x
sheath x	
material	PUR
outer diameter	mm 13 ±0.4
colour	grey
sheath y	
material	stainless steel 316Ti (1.4571)
outer diameter	8

FLEXIM GmbH
Boxberger Str. 4
12681 Berlin
Germany
Tel.: +49 (30) 93 66 76 60
Fax: +49 (30) 93 66 76 80
internet: www.flexim.com
e-mail: info@flexim.com

Subject to change without notification.
Errors excepted.
FLUXUS is a registered trademark of FLEXIM GmbH.
Copyright (©) FLEXIM GmbH 2018